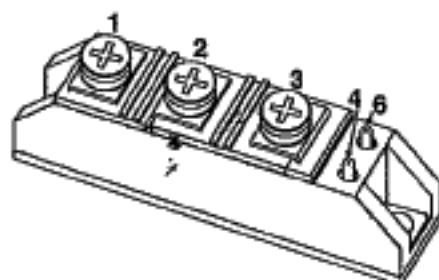
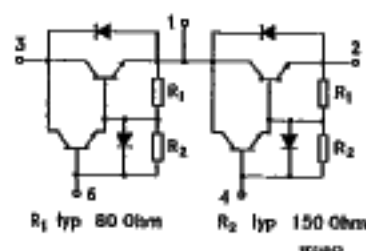


- POWER MODULE WITH INTERNAL ISOLATION (2500V RMS)
- LOW R_{th} JUNCTION TO CASE
- FREEWHEELING DIODE
- ADAPTED FOR HIGH POWER SWITCHING APPLICATIONS

INDUSTRIAL APPLICATIONS:

- MOTOR CONTROL
- HIGH POWER SMPS AND UPS
- HIGH POWER DC/DC AND DC/AC CONVERTERS


TRANSPACK (TO-240)
INTERNAL SCHEMATIC DIAGRAM

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CE0}	Collector-Emitter Voltage ($I_B = 0$)	700	V
V_{CES}	Collector-Emitter Voltage ($V_{BE} = 0$)	1000	V
V_{CEV}	Collector-Emitter Voltage ($V_{BE} = -2V$)	1000	V
V_{CBO}	Collector-Base Voltage ($I_E = 0$)	1000	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	7	V
I_C	Collector Current	35	A
$-I_C$	Reverse Collector Current	35	A
I_B	Base Current	10	A
$-I_{CSM}$	Collector Surge Current	350	A
P_{tot}	Total Dissipation at $T_c = 25^\circ C$	400	W
T_{stg}	Storage Temperature	-55 to 150	$^\circ C$
T_j	Max. Operating Junction Temperature	150	$^\circ C$
V_{ISO}	Insulation Withstand Voltage (AC-RMS)	2500	V

THERMAL DATA


$R_{thj-case}$	Thermal Resistance Junction-case (quarter bridge)	Max	0.62	$^{\circ}\text{C/W}$
$R_{thj-case}$	Thermal Resistance Junction-case (diode)	Max	1.1	$^{\circ}\text{C/W}$
R_{tho-h}	Thermal Resistance Case-heatsink With Conductive Grease Applied	Max	0.05	$^{\circ}\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}\text{C}$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CES}	Collector Cut-off Current ($V_{BE} = 0$)	$V_{CE} = 1000\text{ V}$ $V_{CE} = 700\text{ V } T_J = 125^{\circ}\text{C}$			2 10	mA mA
I_{CEV}	Collector Cut-off Current ($V_{BE} = -2\text{ V}$)	$V_{CE} = 1000\text{ V}$ $V_{CE} = 700\text{ V } T_J = 125^{\circ}\text{C}$			2 10	mA mA
I_{EBO}	Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 2\text{ V}$			150	mA
$V_{CE(sat)*}$	Collector-Emitter Saturation Voltage	$I_C = 35\text{ A } I_B = 3.5\text{ A}$		1.7	3	V
$V_{BE(sat)*}$	Base-Emitter Saturation Voltage	$I_C = 35\text{ A } I_B = 3.5\text{ A}$		2.1	3.5	V
h_{FE*}	DC Current Gain	$I_C = 35\text{ A } V_{CE} = 3\text{ V}$ $I_C = 35\text{ A } V_{CE} = 5\text{ V}$	10 15	35		
t_s t_f	INDUCTIVE LOAD Storage Time Fall Time	$V_{CC} = 300\text{ V } I_C = 35\text{ A}$ $I_{B1} = 3.5\text{ A } V_{BE(off)} = -5\text{ V}$ $T_J \leq 125^{\circ}\text{C}$ (see test circuits)		3.2 0.9	5 1.5	μs μs
V_F	Diode Forward Voltage	$I_F = 35\text{ A}$		1.4	2	V
t_{rr}	Diode Reverse Recovery Time	$I_F = 35\text{ A } di/dt = 100\text{ A}/\mu\text{s}$		0.3	0.6	μs

* Pulsed: Pulse duration = 300 μs , duty cycle 1.5 %


Safe Operating Areas

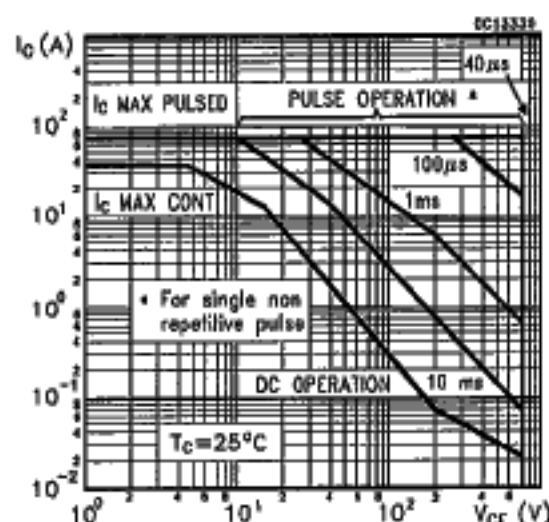


Thermal Impedance

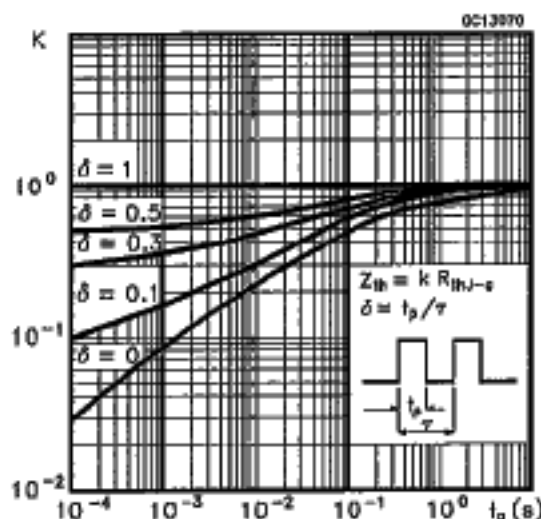


Derating Curves

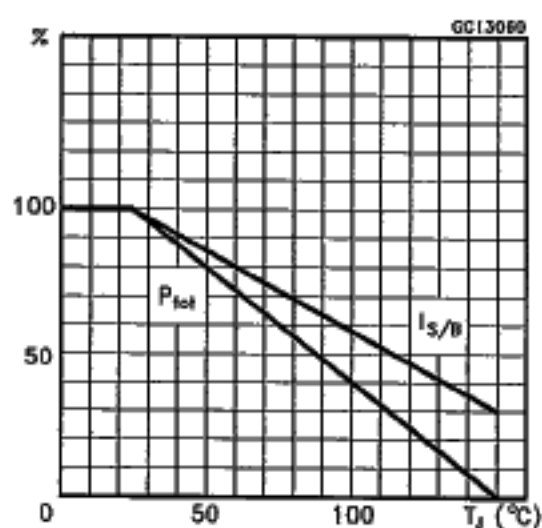


Output Characteristics

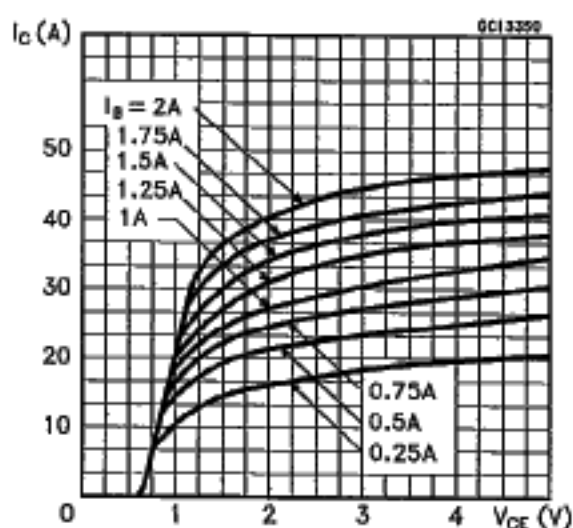


DC Current Gain

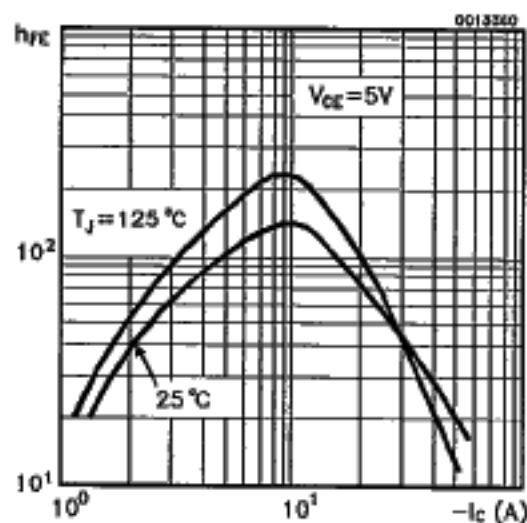


Collector-Emitter Saturation Voltage

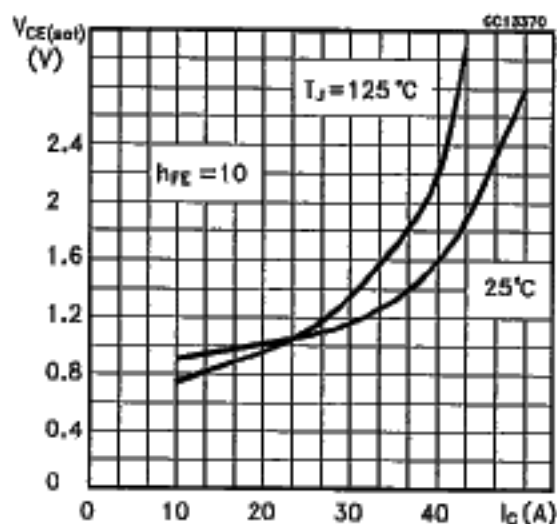


Base-Emitter Saturation Voltage

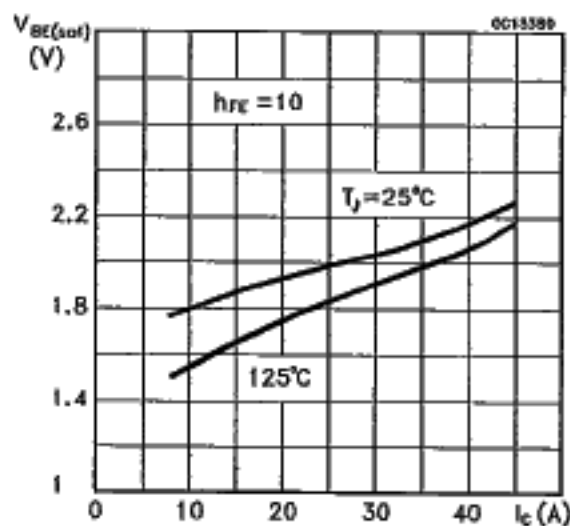


Reverse Biased SOA

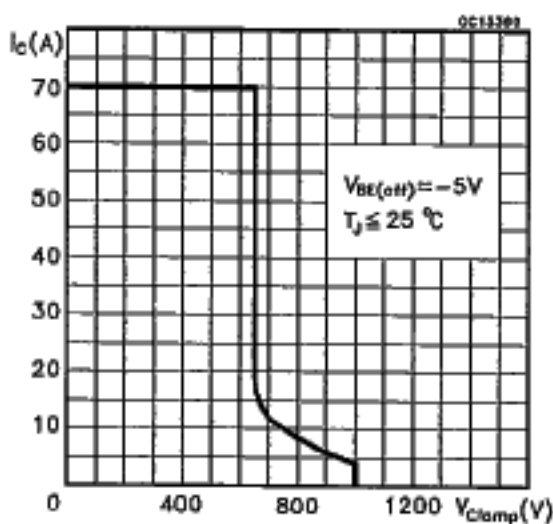


Typical V_F Versus I_F

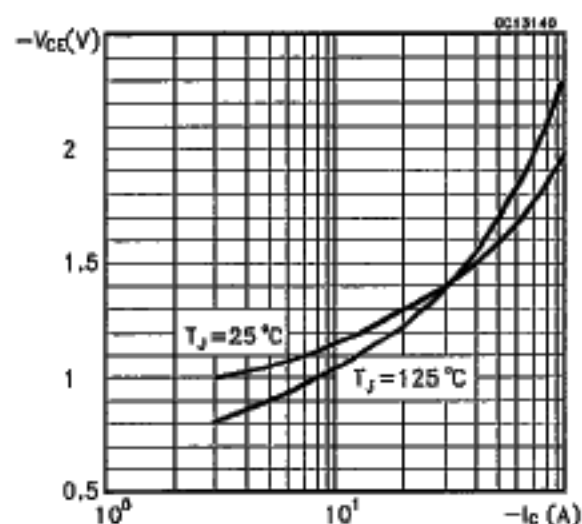


Switching Times Inductive Load

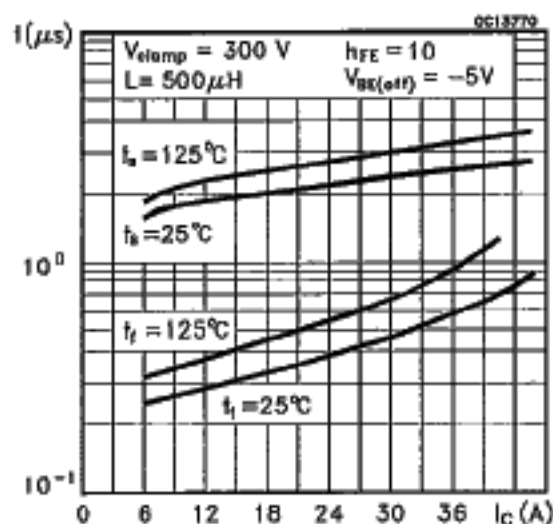

Switching Times Inductive Load Versus Temperature

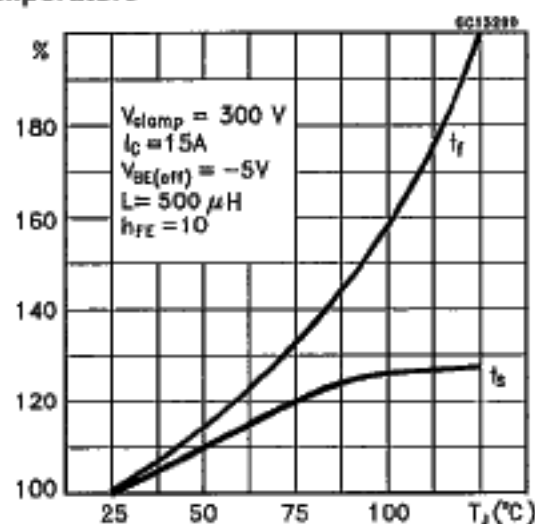



RBSOA Test Circuit

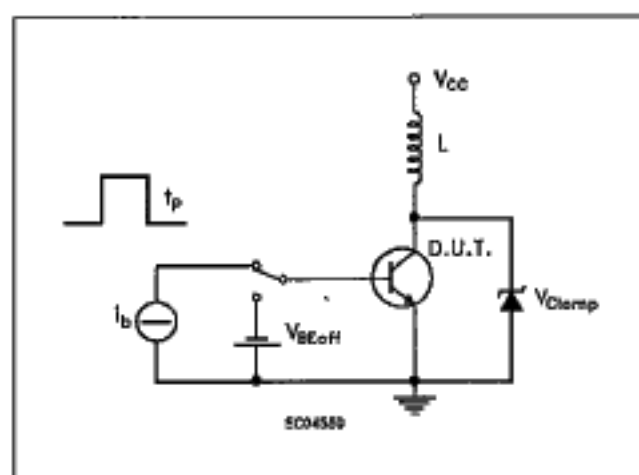

t_p adjusted for nominal I_c ; $I_c/I_b = 10$


Switching Times Test Circuit

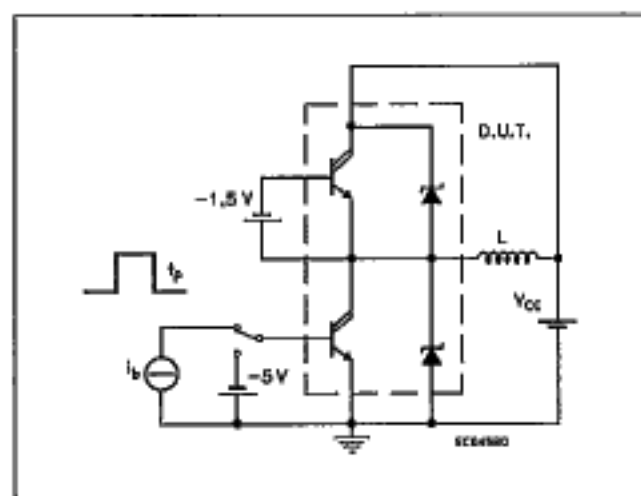



ISOTOP
Fast-on version
sales types with the suffix F

MECHANICAL DATA

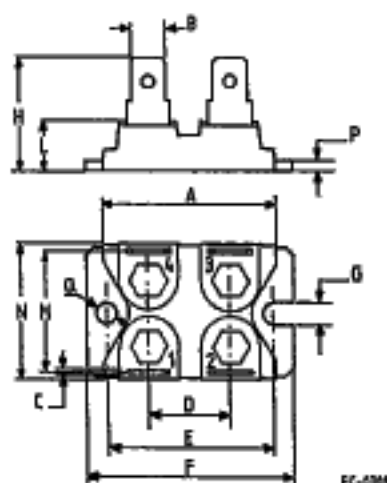

FC-008

	DIMENSIONS			
	mm		Inches	
	min.	max	min.	max
A	31.5	31.7	1.240	1.248
B	6.2	6.4	0.244	0.252
C	0.75	0.85	0.029	0.033
D	14.9	15.1	0.588	0.590
E	30.1	30.3	1.185	1.193
F	38	38.2	1.496	1.503
G	4	—	0.157	—
H	20.3	20.7	0.799	0.815
L	8.9	9.1	0.350	0.358
M	22.4	23	0.881	0.905
N	25.2	25.4	0.992	1.000
P	1.95	2.05	0.076	0.080
Q	4	—	0.157	—

PIN CONNECTIONS

MOSFET

pin 1: Source pin 2: Gate
pin 3: Drain pin 4: Source sensing

DARLINGTON

pin 1: Emitter pin 2: Base1
pin 3: Collector pin 4: Base 2

TRANSISTOR


pin 1: Emitter pin 2: Base
pin 3: Collector pin 4: Emitter sensing

Torque: Mounting 1.3 ± 0.2 N · m (max)

Weight: Package 25.5 g


Note: The mechanical data are the same for the 3 pin version
(4th pin missing)

T-91-20



ISOTOP
Screw version
sales types with the suffix V

MECHANICAL DATA

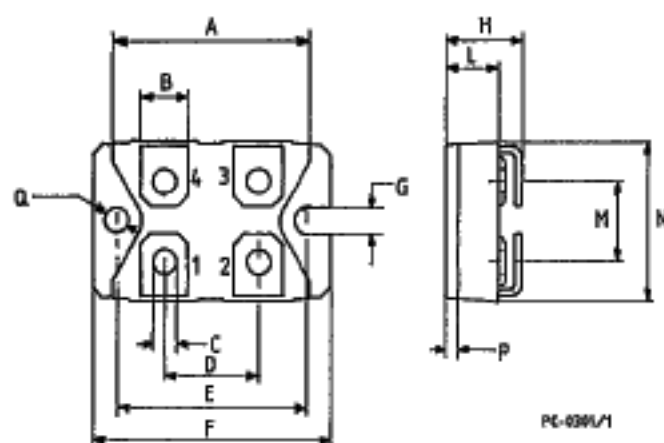

PE-0289/L1

	DIMENSIONS			
	mm		Inches	
	min.	max	min.	max
A	31.5	31.7	1.240	1.248
B	7.8	8.2	0.307	0.322
C	4.1	4.3	0.161	0.169
D	14.9	15.1	0.586	0.590
E	30.1	30.3	1.185	1.193
F	38	38.2	1.496	1.503
G	4	—	0.157	—
H	11.8	12.2	0.464	0.480
L	8.9	9.1	0.350	0.358
M	12.6	12.8	0.496	0.503
N	25.2	25.4	0.992	1.000
P	1.95	2.05	0.076	0.080
Q	4	—	0.157	—

PIN CONNECTIONS

MOSFET

pin 1: Source pin 2: Gate
pin 3: Drain pin 4: Source sensing

DARLINGTON

pin 1: Emitter pin 2: Base1
pin 3: Collector pin 4: Base 2

TRANSISTOR

pin 1: Emitter pin 2: Base
pin 3: Collector pin 4: Emitter sensing

Torque: Terminal $1.3 \pm 0.2 \text{ N} \cdot \text{m}$ (max)
Mounting $1.3 \pm 0.2 \text{ N} \cdot \text{m}$ (max)

Weight: Package 29 g
4 Screws: 7.5 g

Note: The mechanical data are the same for the 3 pin version
(4th pin missing)

