

Technique parameters


Item	Specification
Step angle accuracy	+/-5%,(full step,no load)
Resistance accuracy	+/-10%
Inductance accuracy	+/-20%
Temperature rise	80 ℃ , rated current, 2 phase on
Ambient temperature	-10℃-+50℃
Insulation resistance	100M Ω Min. , 500VDC
Dielectric strength	500VAC for one minute
Shaft radial play	0.06Max(450g-load)
Shaft axial play	0.08Max(450g-load)

Technique specification


Model	Current /phase (A)	Resistance /phase (Ω)	Inductance /phase (mH)	Holding torque (Kg.cm)	leads (strip)	Weight (Kg)	Length (mm)	Wiring diagram
57HZ41-620	2.0	1.4	1.4	3.9	6	0.45	41	
57HZ46-07	2.0	2.0	1.5	7.0	6	0.54	46	2
57HZ51-630	3.0	0.74	0.9	7.2	6	0.65	51	
57HZ56630	3.0	0.75	1.1	9.0	6	0.70	56	1
57HZ54-09	3.0	0.65	1.3	10	8	0.70	54	3
57HZ76-13	3.0	1.0	1.6	13	8	1.0	76	3
57HZ84-20	3.0	1.2	2.6	16	8	1.2	84	3
57HZ115-640	4.0	0.9	2.8	20	6	1.5	115	5

The above products are only the typical products and we can make special products for you according to your requirements!

Dimension

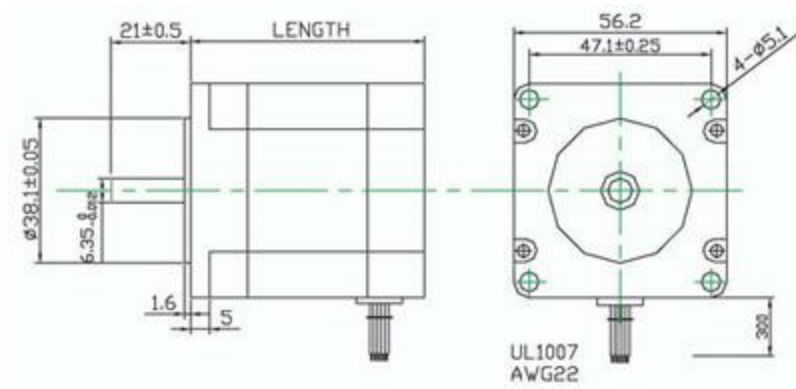


Wiring diagram

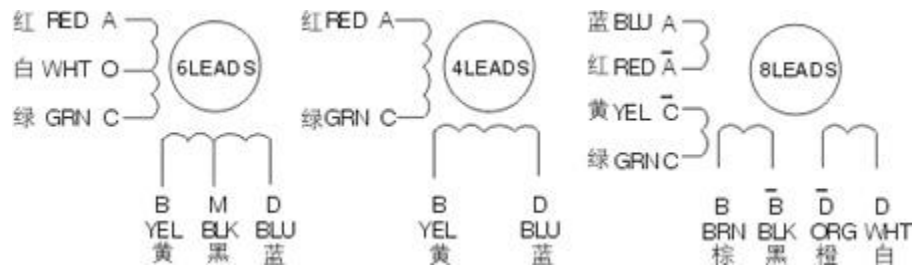

1

2

3

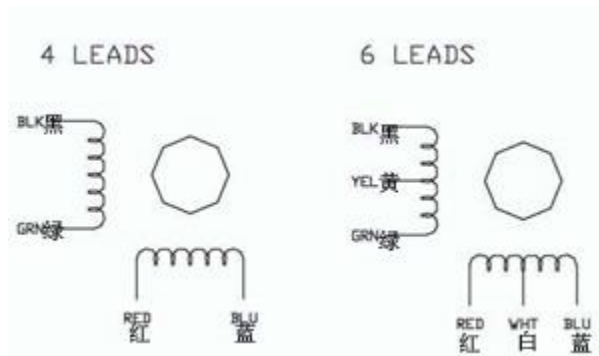

4

5